

UL Two Way Male Outlet - Roof Connections

26-294 / 26-296

Used to create roof connections, fire pump test connections, wall hydrants or sidewalk (free standing) hydrants. Provides 250 GPM minimum per outlet.

- material: cast brass
- U/L listed
- for use up to 175 PSI


Connections

back outlet

26-294



back outlet connection
26-294



Pipe Size	(2) Outlets Male	Part #	Powhatan Part #	Wt. Lbs.
4"	2½" NPT	→ IRC4025	---	9.5
	2½" NPT	→ FRC4025-D	26-294-00001	9.5
	2½" NH (NST)	→ IRC4025F	---	9.5
	2½" NH (NST)	→ FRC4025F-D	26-294-00003	9.5
6"	2½" NPT	FRC6025	26-294-00010	14.25
	2½" NH (NST)	FRC6025F	26-294-00011	14.25
	2½" NYFD	FRC6025NYFD	26-294-00108	14.25

Groove Size	(2) Outlets Male	Part #	Wt. Lbs.
4"	2½" MNPT	→ IRC4025G	7.05
4"	2½" MNST	→ IRC4025GF	7.05

Dimensions


Size	A	B	C
4 x 2½ x 2½ x 2½	7-7/8"	5-3/16"	5-1/4"
6 x 2½ x 2½ x 2½	8-3/16"	6-3/8"	7-5/8"

bottom outlet

26-296



bottom outlet connection
26-296

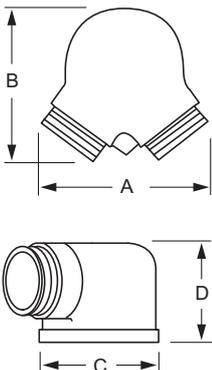

Pipe Size	(2) Outlets Male	Part #	Powhatan Part #	Wt. Lbs.
4"	2½" NPT	→ 90IRC4025	---	6.0
	2½" NPT	→ 90FRC4025-D	26-296-00002	8.25
	2½" NH (NST)	→ 90IRC4025F	---	6.0
	2½" NH (NST)	→ 90FRC4025F-D	26-296-00003	8.25
6"	2½" NPT	90FRC6025	26-296-00008	15.8
	2½" NH (NST)	90FRC6025F	26-296-00011	15.8

Groove Size	(2) Outlets Male	Part #	Wt. Lbs.
4"	2½" MNPT	→ 90IRC4025G	7.05
4"	2½" MNST	→ 90IRC4025GF	7.05

Dimensions

Size	A	B	C	D
4 x 2½ x 2½	7-1/2"	6-3/4"	5-1/8"	4-1/2"
6 x 2½ x 2½	9"	8-1/2"	7-1/2"	5"